


# STEPPING MOTORS

## ENHANCED SIZE 17 1.8° HYBRID STEPPING MOTORS


Specifications	Holding Torque oz-in (N-cm)	Phase Current Amps	Number of Leads	Phase Resistance Ohms	Phase Inductance mH	Rotor Inertia oz-in-sec <sup>2</sup> (kg-cm <sup>2</sup> )	Length (Dim. A in Mechanical) inches (cm)	Weight oz (gm)
MH2-1713-S (D)	30 (21)	1.3	4	2.0	2.4	0.00039 (0.0273)	1.33 (3.3)	6.4 (181.43)
MH2-1715-S (D)	60 (42)	1.7	4	1.5	2.6	0.00069 (0.0492)	1.55 (3.9)	9.6 (272.15)
MH2-1719-S (D)	75 (53)	2.0	4	1.2	2.0	0.00077 (0.0547)	1.85 (4.5)	11.2 (317.52)

### TORQUE SPEED CURVES


MH2-1713

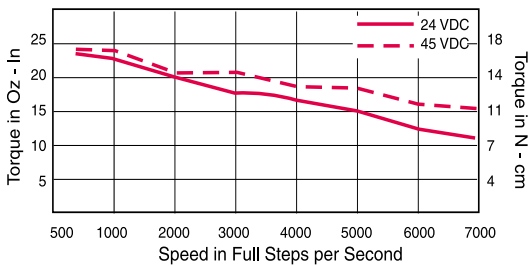


MH2-1719

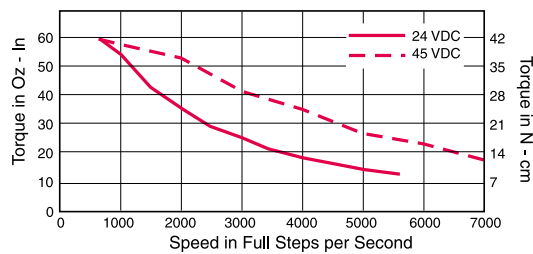

MH2-1715

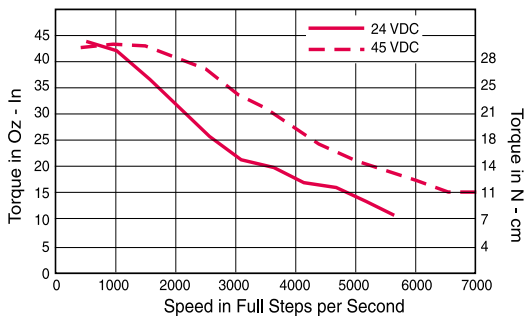

### CONNECTION

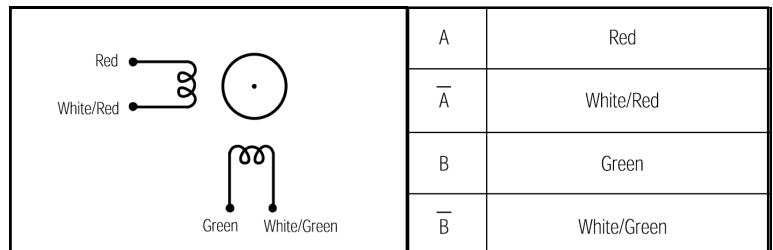

### MECHANICAL

Dimensions in Inches (mm)

